

CLCM1T,2T,4T,5T,6T Wall Modules

Product Data



FEATURES

- Fully compatible with the PANTHER and SERVAL controllers.
- Mountable on 60 mm wall outlet box or directly on a wall.
- Models with setpoint adjustment.
- Models with bypass button and override LED.
- Model with 5-position (auto/0/1/2/3 speed) fan switch.
- Setpoint dials with Celsius relative or Celsius absolute scale.
- Locking cover on all models.
- Operating range 6...40 °C.
- CE-approved.
- IP30 housing.

GENERAL

The COMMAND Wall Modules CLCM1T,2T,4T,5T,6T are a family of direct-wired wall modules for use with the PANTHER Controller. All models have a space temperature sensor; some models have setpoint adjustment, bypass button and override LED, and fan switch.

The CLCM2T,4T,5T,6T packages include two setpoint dials. By default, the "Celsius Relative" type (-5...+5) is mounted, but can be easily replaced with the "Celsius Absolute" type (12...30 °C).

SPECIFICATIONS

Table 1. CLCM Wall Module models

type no.	setpoint adjustment	bypass button + override LED	fan switch	compatible with
CLCM1T11N	—	—	—	PANTHER + SERVAL
CLCM2T11N	12...30 °C (abs.); ± 5 K (rel.)	—	—	
CLCM4T111	12...30 °C (abs.); ± 5 K (rel.)	✓	—	
CLCM5T111	12...30 °C (abs.); ± 5 K (rel.)	✓	three-position	
CLCM6T111	12...30 °C (abs.); ± 5 K (rel.)	✓	five-position	

NOTE: See also CLCM1T,2T,4T,5T,6T Installation Instructions (Product Literature no.: EN1Z-901GE51) for wall module settings and wiring diagrams.

Temperature Sensor Accuracy

The COMMAND Wall Modules CLCM1T,2T,4T,5T,6T are furnished with a 20kΩ NTC temperature sensor that follows a specific temperature-resistance curve. See Fig. 1. The PANTHER Controller used with the CLCM1T,2T,4T,5T,6T employs an algorithm that provides readings close to the actual temperature.

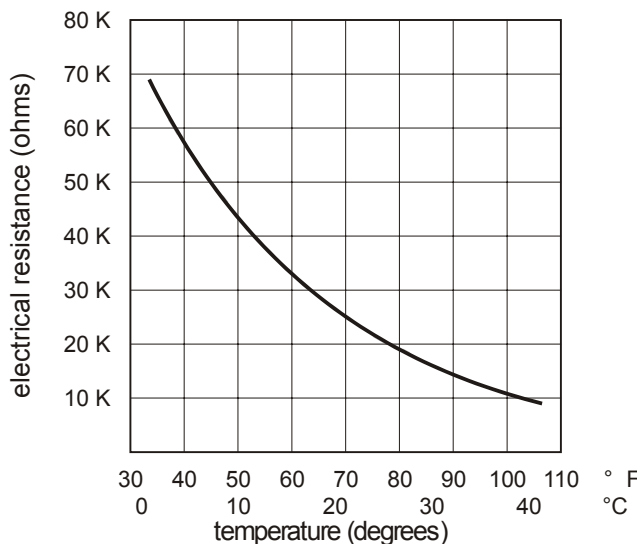

Fig. 1. Temperature vs. resistance for 20kΩ sensor

Table 2 summarizes the sensor accuracy of the COMMAND Wall Modules CLCM1T,2T,4T,5T,6T for normal operating temperatures. Throughout the range of 6...40°C, the accuracy is better than ±0.42°C.

Table 2. Temperature sensor accuracy

ambient temperature (°C)	max. error (°C)	nominal resistance (Ω)
15.5	±0.29	31543
18.3	±0.27	27511
21.1	±0.27	24047
26.7	±0.27	18490
29.5	±0.29	16264

CLCM2T,4T,5T,6T Setpoint Dial

The CLCM2T,4T,5T,6T can be fitted with either an absolute-scale setpoint dial or a relative-scale setpoint dial; the PANTHER Controller must be configured, accordingly. This can be done using either COACH / COACH ONLINE or (in the case of the CLPA21LC11 and CLPA21LC21) the PANTHER Controller's MMI.

The relation between setpoint and resistance is given in Table 3. Accuracy of resistance is:

- ±5% in middle position, e.g. 5225...5775 Ω
- ±10% in end position, e.g. 9450...11550 Ω.

Table 3. Setpoint values vs. resistances

relative scale (Kelvin)		absolute scale (°C)	
setpoint	nominal resistance (Ω)	setpoint	nominal resistance (Ω)
-5	9574.0	12	9958.0
-4	8759.2	13	9468.7
-3	7944.4	14	8979.3
-2	7129.6	15	8490.0
-1	6314.8	16	8000.7
0	5500.0	17	7511.3
1	4685.2	18	7022.0
2	3870.4	19	6532.7
3	3055.6	20	6043.3
4	2240.8	21	5554.0
5	1426.0	22	5064.7
		23	4575.3
		24	4086.0
		25	3596.7
		26	3107.3
		27	2618.0
		28	2128.7
		29	1639.3
		30	1150.0

CLCM4T,5T,6T Bypass Button

The bypass button of the CLCM4T,5T,6T is a normally-open, pushbutton-operated switch used to override the PANTHER Controller's scheduled operating mode.

In the case of the CLCM4T, using either COACH ONLINE or (in the case of the CLPA21LC11) the PANTHER Controller's MMI, the application engineer can assign the bypass button's output to either an analog input or a digital input of the PANTHER Controller.

NOTE: In addition, the wall module's jumpers must also be set accordingly. Thus, if e.g. jumper "A" is set to position "3:XL500," then the contact is potential-free, enabling the bypass button's output to be assigned to a digital input. If set otherwise, the contact is connected to ground, and the bypass button's output must be assigned to an analog input. See also CLCM1T,2T,4T,5T,6T Installation Instructions (Product Literature no.: EN1Z-901GE51).

In the case of the CLCM5T,6T, the application engineer has no choice but to assign the bypass button's output to an analog input of the PANTHER Controller.

CLCM4T,5T,6T Override LED

The override LED of the CLCM4T,5T,6T is currently not in use.

Contact your local CentralLine-PARTNER for further details.

CLCM5T,6T Fan Switch

The CLCM5T,6T are equipped with a non-configurable fan speed switch (essentially a series of resistances based on fan switch position – see also Table 4 for those resistances).

Table 4. Program settings for CLCM5T,6T

switch position	resistance (Ω)	fan behavior
auto	1861.4 \pm 100	runs as scheduled
0	2686.4 \pm 100	OFF
1	3866.4 \pm 100	runs at speed 1
2*	3041.4 \pm 100	runs at speed 2
3*	4601.4 \pm 100	runs at speed 3
bypass activated	0...100	unchanged
* CLCM6T, only		

NOTE: An additional 10k ohm (\pm 2%) series resistor can be set by jumper (jumper "A" set to position "1:XX," jumper "B" set to position "3:XL500"). See also CLCM1T,2T,4T,5T,6T Installation Instructions (Product Literature no.: EN1Z-901GE51) for jumper settings.

CONSTRUCTION

The COMMAND Wall Modules CLCM1T,2T,4T,5T,6T feature a two-piece construction consisting of cover and an internally wired sub-base. Field wiring 1.5 to 0.34 mm² connects to a terminal block on the PCB.

Mounting Options:

The COMMAND Wall Modules CLCM1T,2T,4T,5T,6T can be mounted on a 60 mm diameter junction box or directly on a wall.

Dimensions (H × W × D)

104 × 104 × 33 mm

RATINGS, APPROVALS

Environmental Ratings:

Operating Temperature: 6...40 °C

Shipping Temperature -40...65 °C

Relative Humidity:

5...95% non-condensing.

Approvals:

CE.

Manufactured for and on behalf of the Environmental and Combustion Controls Division of Honeywell Technologies Sàrl, Ecublens, Route du Bois 37, Switzerland by its Authorized Representative:

Centraline
Honeywell GmbH
Böblinger Straße 17
D-71101 Schönaich
Tel +49 7031 637 845
Fax +49 7031 637 846
info@centraline.com
www.centraline.com

Centraline
Honeywell Control Systems Ltd.
Arlington Business Park
UK-Bracknell, Berkshire RG12 1EB
Tel +44 13 44 656 565
Fax +44 13 44 656 563
info-uk@centraline.com
www.centraline.com

Printed in Germany.
Subject to change
without notice.
EN0Z-0901GE51 R0705

DIN EN ISO
9001/14001

